



Inground



01 PARAMETER

DESCRIPTION

- Save more than 90% energy than Halogen Lamp.
- Green lighting, Eco-friendly, no UV or IR radiation in the beam, mercury free-sale.
- Anti-shock, anti-moisture, no RF interference, no buzzing noise and no fluorescent flickering-stable.

LISTINGS

- CE ROHS is provide, IP65 Range
- Long life: Up to 50000 hours life.
- Control Method: Single color, Automatic change, DMX512, RF control series

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT, R/G/B/Y/P/RGB
- CRI: 80
- House face: Black, Gary or White

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam Angle: 90 DEGREE
- Driver Efficiency: >50%
- Power Factor: >0.5
- THD < 25%

THERMAL




- -20°C ~ +55°C operating temperature
- -20°C ~ +50°C storage temperature

CONSTRUCTION

- Die-cast aluminum housing
- Built-in Waterproof LED driver

WARRANTY

- 5years warranty; see cnmdled.com for warranty details

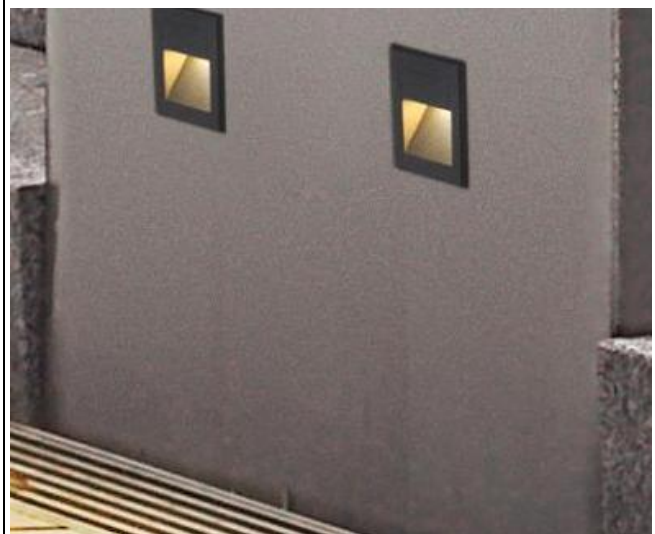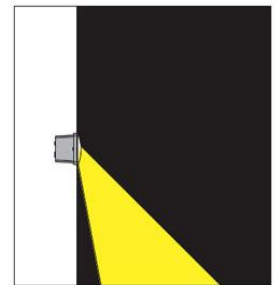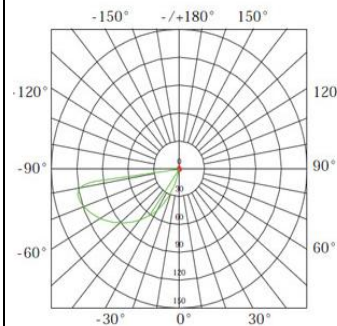

APPLICATIONS

- Outdoor stairs
- Building
- Park
- Sports stadium
- Corridors
- Wall decorations



02 PERFORMANCE SUMMARY

Item	Watts	Lumens	LPW	CCT	CRI	INPUT	SIZE	IP RANGE	DIM
MDL-UDGL8	7W	700	100	3000K-6500K	80+	AC220-240V	210*85MMMM	IP65	NO